

All purpose band

- Easy to form around any section
- Flame retardant Low Smoke PPA coating
- Thick coating - kind to hands / cable
- Simple fastening with nuts, bolts, screws
- Three widths available
- 316 Stainless steel or galvanised carbon steel



Coated band

- Flame retardant, Low Smoke PPA coating
- Thick coating kind to hands / cable
- 316 or 304 Type Stainless Steel



Baritam Tool C075
 For application of coated band.
 See page 14 for details

Clips Uncoated



Type 316 Stainless Steel Pkg. Qty. 100

Cat. No.	Width		Weight	
	In.	mm	Lbs	Kg
AE452	1/4	6.35	0.3	0.1
AE453	3/8	9.53	0.6	0.3
AE454	1/2	12.70	1.0	0.4
AE455	5/8	15.88	1.1	0.5
AE456	3/4	19.05	1.3	0.6

Coated clips are available - price on request

BAND-IT All Purpose Band



Metal thickness 0.030 (0.75mm) Coated thickness 0.050 (1.3mm)

Cat. No.	Width*		Length		Weight		Hole Diameter	
	In.	mm	Ft.	M	Lbs	Kg	In	mm

Type 316 Stainless Steel (PPA571 Coated)

AE465	1/2	12	33.0	10	1.2	0.6	3/16	5
AE466	3/4	17	33.0	10	2.1	1.0	9/32	7
AE467	1	26	33.0	10	2.9	1.3	5/16	8
AE475	1/2	12	82.5	25	3.1	1.4	3/16	5
AE476	3/4	17	82.5	25	5.3	2.4	9/32	7
AE477	1	26	82.5	25	7.3	3.3	5/16	8
AB465	1/2	12	9.9	3	0.4	0.2	3/16	5
AB466	3/4	17	9.9	3	0.4	0.2	9/32	7

Type 316 Stainless Steel (Uncoated)

AE405	1/2	12	33.0	10	1.2	0.6	3/16	5
AE406	3/4	17	33.0	10	1.9	0.9	9/32	7
AE407	1	26	33.0	10	2.2	1.0	5/16	8
AE425	1/2	12	82.5	25	3.1	1.4	3/16	5
AE426	3/4	17	82.5	25	4.6	2.1	9/32	7
AE427	1	26	82.5	25	5.5	2.5	5/16	8
AB405	1/2	12	9.9	3	0.4	0.2	3/16	5
AB406	3/4	17	9.9	3	0.4	0.2	9/32	7

Galvanised Carbon Steel (PPA 571 Coated)

AE565	1/2	12	33.0	10	1.2	0.6	3/16	5
AE566	3/4	17	33.0	10	2.0	0.9	9/32	7
AE567	1	26	33.0	10	4.0	1.8	5/16	8
AE575	1/2	12	82.5	25	3.1	1.4	3/16	5
AE576	3/4	17	82.5	25	5.3	2.4	9/32	7
AE577	1	26	82.5	25	9.9	4.5	5/16	8
AB565	1/2	12	9.9	3	0.4	0.2	3/16	5
AB566	3/4	17	9.9	3	0.4	0.2	9/32	7

Galvanised Carbon Steel (Uncoated)

AE505	1/2	12	33.0	10	1.2	0.6	3/16	5
AE506	3/4	17	33.0	10	2.0	0.9	9/32	7
AE507	1	26	33.0	10	4.0	1.8	5/16	8

* Width can vary depending on coating thickness



316 and 201 Stainless Steel Band PPA 571 Coated Pkg. Qty. 1

316SS Cat No.	201SS Cat No.	Width		Length		Weight	
		In.	mm	Ft.	M	Lbs	Kg
AE432		1/4	6.35	82.5	25	2.0	0.9
AE433	AE933	3/8	9.53	82.5	25	2.6	1.2
AE434	AE934	1/2	12.70	82.5	25	3.5	1.6
AE435	AE935	5/8	15.88	82.5	25	4.4	2.0
AE436	AE936	3/4	19.05	82.5	25	5.3	2.4

Approximate thickness = 0.048" (1.22mm), when coated



316 Stainless Steel Band

Uncoated Pkg. Qty. 1

Cat. No.	Width		Length		Weight	
	In.	mm	Ft.	M	Lbs	Kg
AE442	1/4	6.35	82.5	25	2.0	0.9
AE443	3/8	9.53	82.5	25	2.6	1.2
AE444	1/2	12.70	82.5	25	3.5	1.6
AE445	5/8	15.88	82.5	25	4.4	2.0
AE446	3/4	19.05	82.5	25	5.3	2.4

Thickness = 0.016" (0.406mm)



BAND-IT Ties


- Re-useable
- Low Smoke, Zero Halogen, PPA Coated
- Tension by hand or application Tool
- 316 Stainless steel
- For cable bundling in harsh environments
- Thick coating protects cable/hands
- Vibration proof



BAND-IT Ties Coated with PPA Pkg. Qty. - 100

Cat. No.	Max Bundle Dia		Width		Length		Weight	
	In.	mm	In.	mm	In.	mm	Lbs	Kg
AE111	1.5	38	1/4	6.35	6	152	1.4	0.6
AE112	2.5	63	1/4	6.35	9	229	1.8	0.8
AE113	3.4	86	1/4	6.35	12	305	2.1	1.0
AE114	5.4	137	1/4	6.35	18	457	3.0	1.4
AE115	7.3	185	1/4	6.35	24	610	3.7	1.7
AE311	1.5	38	3/8	9.53	6	152	1.8	0.8
AE312	2.5	63	3/8	9.53	9	229	2.5	1.1
AE313	3.4	86	3/8	9.53	12	305	3.1	1.4
AE314	5.4	137	3/8	9.53	18	457	4.4	2.0
AE315	7.3	185	3/8	9.53	24	610	6.6	3.0
AE316	9.1	231	3/8	9.53	30	762	7.0	3.2
AE317	11.0	280	3/8	9.53	36	914	8.3	3.8

Note: metal thickness .015" (.38mm) approximate coated thickness = .040"(1.0mm)
Standard colour Black other colours available on request

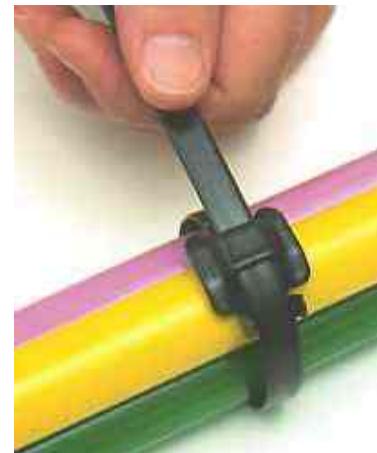

C075 Bantam Tool



BAND-IT Ties - Uncoated Pkg. Qty. - 100

Cat. No.	Max Bundle Dia		Width		Length		Weight	
	In.	mm	In.	mm	In.	mm	Lbs	Kg
AE101	1.5	38	1/4	6.35	6	152	1.4	0.6
AE102	2.5	63	1/4	6.35	9	229	1.8	0.8
AE103	3.4	86	1/4	6.35	12	305	2.1	1.0
AE104	5.4	137	1/4	6.35	18	457	3.0	1.4
AE105	7.3	185	1/4	6.35	24	610	3.7	1.7
AE301	1.5	38	3/8	9.53	6	152	1.8	0.8
AE302	2.5	63	3/8	9.53	9	229	2.5	1.1
AE303	3.4	86	3/8	9.53	12	305	3.1	1.4
AE304	5.4	137	3/8	9.53	18	457	4.4	2.0
AE305	7.3	185	3/8	9.53	24	610	6.6	3.0
AE306	9.1	231	3/8	9.53	30	762	7.0	3.2
AE307	11.0	280	3/8	9.53	36	914	8.3	3.8



AE200 Cable Tie Tensioner



AE201 Tensioning Hook

Application Tools Pkg. Qty. - 1

Cat. No.	Description	Weight	
		Lbs.	Kgs.
C075	For tensioning and cutting BAND-IT Ties and Coated Band. 3 way handle position for pistol grip or two hand operation	2.6	1.20
AE200	For tensioning BAND-IT Ties and Multi-Lok Ties (No cut off)	0.6	0.30
AE201	For tensioning BAND-IT Ties and Multi-Lok Ties (No cut off)	0.1	0.05

Multi-Lok Ties

- Self Locking
- Flame retardant
- U.V. and corrosion resistant
- Applied by hand or M503, KE922, AE200 and AE201 tools
- Tensile Strength > 90 Kg.
- Coated in Nylon 11 For greater corrosion resistance
- Excellent minimum loop tensile strength. In excess of 890N (7mm wide) and 1112N (12mm wide) for both coated and uncoated versions


Multi-Lok Ties Coated

Pkg. Qty 100



Type 316 Stainless Steel Coated with Nylon 11

Cat. No.	Maximum Bundle Dia		Width		Length		Weight	
	In.	mm	In.	mm	In.	mm	Lbs.	Kg.
AE611	1.3	33	0.28	7	6	150	0.66	0.30
AE612	2.2	57	0.28	7	9	225	0.99	0.45
AE613	3.2	81	0.28	7	12	300	1.32	0.60
AE614	5.1	129	0.28	7	18	450	1.76	0.80
AE615	7.1	180	0.28	7	24	610	2.64	1.20
AE711	1.3	33	0.47	12	6	150	1.10	0.50
AE712	2.2	57	0.47	12	9	225	1.65	0.75
AE713	3.2	81	0.47	12	12	300	2.20	1.00
AE714	5.1	129	0.47	12	18	450	2.97	1.35
AE715	7.1	180	0.47	12	24	610	4.29	1.95

Application Tools


 M503 Multi-Lok tool
with adjustable tension
and automatic cut off
weight 0.94Lbs. (.43Kg.)

 KE922 Manual Tensioning
tool with cut off lever
Weight 1.25Lbs. (.57Kg.)

Multi-Lok Ties Uncoated

Pkg. Qty 100



Type 316 Stainless Steel Uncoated

Cat. No.	Maximum Bundle Dia		Width		Length		Weight	
	In.	mm	In.	mm	In.	mm	Lbs.	Kg.
AE601	1.9	48	0.28	7	6	150	0.66	0.30
AE602	2.8	71	0.28	7	9	225	0.81	0.40
AE603	3.8	96	0.28	7	12	300	1.21	0.55
AE604	5.7	144	0.28	7	18	450	1.98	0.90
AE605	7.6	193	0.28	7	24	610	2.64	1.20
AE701	1.9	48	0.47	12	6	150	1.10	0.50
AE702	2.8	71	0.47	12	9	225	1.65	0.75
AE703	3.8	96	0.47	12	12	300	2.20	1.00
AE704	5.7	144	0.47	12	18	450	3.19	1.45
AE705	7.6	193	0.47	12	24	610	4.29	1.95


 AE200 Tensioner
See page 14 for details

 AE201 Tensioning Hook
See page 14 for details

Ball-Lok Ties

- Improved tensile strength
- Available in 316 or 304 Stainless Steel
- 316SSties also available fully coated in Epoxy
- Self locking for speedy application
- Smooth Internal Diameter
- Install by hand or with K502, KE922 tools



304 and 316 Stainless Steel Package Quantity 100


Uncoated

Lloyd's
NASC
JAS
DIN
CE

Cat. No.	Cat No.	Maximum Bundle Diameter		Approximate Length		Approximate Width		Approximate Weight		Min. Loop Tensile Strength	
		in	mm	in	mm	in	mm	Lbs.	Kg.	Lbs	N
304 SS	316 SS										
KE1118	KE0118	1.2	30	5.9	150	0.18	4.6	0.42	0.19	200	890
KE1128	KE0128	2.0	50	7.9	201	0.18	4.6	0.57	0.26	200	890
KE1138	KE0138	2.7	69	10.2	259	0.18	4.6	0.70	0.32	200	890
KE1148	KE0148	4.0	102	14.2	360	0.18	4.6	0.92	0.42	200	890
KE1158	KE0158	6.0	152	20.4	520	0.18	4.6	1.32	0.60	200	890
KE1168	KE0168	8.0	203	26.8	679	0.18	4.6	1.76	0.80	200	890
KE1178	KE0178	10.0	254	33.0	838	0.18	4.6	2.07	0.94	200	890
KE1188	KE0188	12.0	305	42.0	1067	0.18	4.6	2.38	1.08	200	890
KE1328	KE0328	2.0	50	7.9	201	0.31	7.9	0.99	0.45	300	1335
KE1338	KE0338	2.7	69	10.2	259	0.31	7.9	1.32	0.60	300	1335
KE1348	KE0348	4.0	102	14.2	360	0.31	7.9	1.67	0.76	300	1335
KE1358	KE0358	6.0	152	20.4	520	0.31	7.9	2.23	1.04	300	1335
KE1368	KE0368	8.0	203	26.8	679	0.31	7.9	2.86	1.30	300	1335
KE1378	KE0378	10.0	254	33.0	838	0.31	7.9	3.52	1.60	300	1335
KE1388	KE0388	12.0	305	42.0	1067	0.31	7.9	4.62	2.10	300	1335



K502 Ball-Lok Tool with adjustable
Tension and automatic cut off
Weight .94Lbs (.43Kg)



316 Stainless Steel

Package Quantity 100

Lloyd's
NASC
JAS
DIN
CE

Epoxy Coated

Cat. No.	Max.Bundle Diameter		Approximate Length		Approximate Width		Approximate Weight		Min. Loop Tensile Strength	
	in	mm	in	mm	in	mm	Lbs.	Kg.	Lbs	N
KE0228	2.0	50	7.9	201	0.18	4.6	0.62	0.28	150	668
KE0238	2.7	69	10.2	259	0.18	4.6	0.75	0.34	150	668
KE0248	4.0	102	14.2	360	0.18	4.6	1.01	0.46	150	668
KE0258	6.0	152	20.4	520	0.18	4.6	1.41	0.64	150	668
KE0268	8.0	203	26.8	679	0.18	4.6	1.80	0.82	150	668
KE0278	10.0	254	33.0	838	0.18	4.6	2.33	1.06	150	668
KE0428	2.0	50	7.9	201	0.31	8.0	1.16	0.53	250	1112
KE0438	2.7	69	10.2	259	0.31	8.0	1.50	0.68	250	1112
KE0448	4.0	102	14.2	360	0.31	8.0	1.78	0.81	250	1112
KE0458	6.0	152	20.4	520	0.31	8.0	2.46	1.12	250	1112
KE0468	8.0	203	26.8	679	0.31	8.0	3.17	1.44	250	1112
KE0478	10.0	254	33.0	838	0.31	8.0	3.83	1.74	250	1112



KE922 Manual Tensioning
Tool with tail cut-off lever
Weight 1.25Lbs (.57Kg)

Custom Length Ball-Lok Banding System

Available in both 304 and 316 Stainless steel.

2 widths 0.18"(4.6mm) and .31"(7.9mm).

Apply by hand or use the K502 or KE922 tools

For further details please contact sales desk

16



Heads: Box of 1000
CB1569, CB2569

Bands and Heads

Part No.	Width mm	Pack Type	Material
CE1569	7.9	100m reel	304 S. Steel
CE4569	7.9	100m reel	316 S. Steel
CB1569	7.9	Box of 1000	316 S. Steel
CE3569	4.6	100m reel	304 S. Steel
CE2569	4.6	100m reel	316 S. Steel
CB2569	4.6	Box of 1000	316 S. Steel



Band: 100m per Reel
CE3569, CE2569
CE1569, CE4569

Tie-Lok Ties

- Low Profile, Small head
- No slip back - Dual lock
- Minimum Loop Tensile Strength:
 - Mini Tie-Lok - 100 Lbs (445N)
 - Tie-Lok - 200 Lbs (890N)
 - Ultra-Lok - 400Lbs (1776N)

Smooth I.D. Tie-Lok Ties Pkg. Qty. 100

Stainless Steel Thickness .015" (.38mm) Band width 0.25" (6.35mm)



Cat. No.	316SS Cat.No.	Max. Bundle Dia.		Length		Weight	
		In.	mm	In.	mm	Lbs.	Kg.
AS211	AS411	2	51	10.0	254	1.2	0.54
AS212	AS412	4	101	16.5	419	1.8	0.86
AS213	AS413	6	152	22.5	572	2.6	1.17
AS214	AS414	8	203	29.0	737	3.3	1.50
AS215	AS415	10	254	35.0	889	3.9	1.79

0.38"(9.53 mm) wide version available on special order. Contact our Sales Desk.



IT1000

A920



Smooth I.D. Mini Tie-Lok Ties Pkg. Qty. 100

Stainless Steel Thickness .015" (.38mm) Band width 0.177" (4.5mm)



Cat. No.	304SS Cat.No.	Max. Bundle Dia.		Length		Weight	
		In.	mm	In.	mm	Lbs.	Kg.
AS221	AS421	1	25	6.5	165	0.7	0.30
AS222	AS422	2	51	10.0	254	0.9	0.40
AS223	AS423	4	102	16.0	406	1.4	0.61
AS224	AS424	6	152	22.5	572	1.9	0.84
AS225	AS425	8	203	29.0	737	2.4	1.06



IT0750

A910

Smooth I.D. Ultra-Lok Ties Pkg. Qty. 100

Austenitic Stainless Steel

Band Width 0.25" (6.35mm)

Cat. No.	Max. Bundle Dia.		Length		Weight	
	In.	mm	In.	mm	Lbs.	Kg.
AU202	1.5	38.1	8.0	203	1.0	0.45
AU203	2.5	63.5	10.0	254	1.2	0.54
AU204	3.0	76.2	12.0	305	1.4	0.64
AU205	3.8	96.5	14.0	356	1.6	0.74
AU206	4.5	114.3	16.0	406	1.9	0.86
AU207	5.4	137.2	19.0	483	2.2	1.00
AU208	7.0	177.8	24.0	610	2.7	1.22
AU209	8.5	215.9	29.0	737	3.2	1.46
AU215	10.5	266.7	35.0	889	3.9	1.75



IT3000

A940

Smooth I.D. Universal Clamps Pkg. Qty. 100

Austenitic Stainless Steel

Thickness .015" (.38mm) Width 0.25" (6.35mm)

Cat. No.	Maximum Bundle Dia.		Weight	
	In.	mm	Lbs.	Kgs.
JU242	1.0	25	1.2	0.54
JU252	1.5	38	1.4	0.64
JU253	2.0	51	1.7	0.77
JU254	2.5	64	1.9	0.86
JU256	3.0	75	2.2	1.00
JU257	3.5	89	2.4	1.09
JU258	4.0	102	2.6	1.18
JU259	4.5	114	2.7	1.23



Hand Tools

Cat. No.	Description	Weight	
		Lbs.	Kg.
A920	Tie-Lok II Tool for Tie-Lok and Universal Bands/Clamps	0.94	0.43
A910	Mini Tie-Lok Tool for Mini Tie- Lok Ties	0.94	0.43
A940	Ultra-Lok Tool for Ultra-Lok Ties, Tie-Lok Ties, Universal Clamps	0.94	0.43

Pneumatic Tools IT1000 or IT3000

Pneumatic Tools

Cat. No.	Description	Weight	
		Lbs.	Kgs.
IT1000	Pneumatic Tool for all 1/4" (6.35mm) Tie-Lok and Universal Bands/Clamps.	10.4	4.70
IT0750	Pneumatic Tool for all 0.177"(4.5mm) Mini Tie-Lok Ties.	10.4	4.70
IT3000	Pneumatic Tool for all 1/4" (6.35mm) Ultra-Lok and Tie-Lok Bands/Clamps.	10.4	4.70
IT6000	Pneumatic Tool for all 3/8" (9.5mm) Tie-Lok Ties.	10.4	4.70
I17490	Bench Mounting and Foot Control Kit.	1.4	0.63
A320	Pneumatic Tool Locator allows installation of clamp a constant distance from reference surface.	0.4	0.20



IT1000
IT0750,
IT3000,
IT6000

Tie-Dex Clamping System

- EMI, RFI Shield termination
- Patented
- No welding, heating or crimping
- Low profile design
- Manual or Pneumatic tooling
- Calibrated application tools
- Military specifications applicable
Environmental MIL Standard 810C/810A, MIL-C-38999H
Electrical details on request
Mechanical MIL-C-85049, MIL-STD-1344, MILSTD-1344A,
MIL Standard 901C



Tie-Dex Bands and Tie-Dex Micro Bands provide a permanent shield termination for any size and type of backshell design.



Tie-Dex (Flat)

Tie-Dex Band Type 304 Stainless Steel .020" (.51mm) Thickness x .24" (6.1mm) Wide

Cat. No.	Description	Pkg.	Qty. per Pack	Length		Weight	
		Type		In.	mm	Lbs.	Kg.
A10088	Coiled and Individually Bagged	Box	100	14.25	362	2.05	0.93
A10089	Flat and bagged	Bag	100	14.25	362	2.05	0.93
A11089	Flat and bagged	Bag	100	18.00	457	2.52	1.10



Tie-Dex (Coiled double wrap)

Tie-Dex II Tool

Cat. No.	Description	Qty. per Pack	Weight	
			Lbs	Kg.
A40199	Pre-calibrated Hand Tool	1	1.20	0.550
A44699	Calibration Key	1	0.15	0.070
A40699	Replacement Part - Cut-off Blade Kit	1	0.01	0.005



A40199 Tie-Dex II Hand Tool



A35199 Tie-Dex II Pneumatic Tool
A35599 Tie-Dex II Micro Pneumatic Tool

Tie-Dex II Tool/Gauge Kit (see page 19)

A49099	0.24" (6.1mm) Kit, Tie-Dex II Tool/gauge	1	4.60	2.12
--------	--	---	------	------

Tie-Dex Gauge

A48599	0.24" (6.1mm) Tension Gauge	1	1.00	0.45
--------	-----------------------------	---	------	------

Accessories for Tie-Dex II and Tie-Dex Micro pneumatic tools

Tie-Dex II Pneumatic Bench Mount/Foot Control Kit

Cat. No.	Description	Qty. per Pack	Weight	
			Lbs	Kg.
A37099	Mounts Pneumatic Tool to work bench. Foot control allows hands-free operation	1	1.40	0.63

Tie-Dex II Pneumatic Tool Locator

A32099	Allows Clamps to be installed same distance from reference surface	1	4.60	2.12
--------	--	---	------	------

Tie-Dex Clamping System

- EMI, RFI Shield termination
- Patented
- No welding, heating or crimping
- Low profile design
- Manual or Pneumatic tooling
- Calibrated application tools
- Military specifications applicable
Environmental MIL Standard 810C/810A, MIL-C-38999H
Electrical details on request
Mechanical MIL-C-85049, MIL-STD-1344, MILSTD-1344A,
MIL Standard 901C



Tie-Dex Bands and Tie-Dex Micro Bands provide a permanent shield termination for any size and type of back-shell design.



Tie-Dex (Flat)



Tie-Dex
(Coiled double wrap)

Tie-Dex Micro Band

Type 304 Stainless Steel .015" (.38mm) Thickness x .12" (3.05mm) wide

Cat. No.	Description	Pkg. Type.	Qty. per Pack	Length		Weight	
				In.	mm	Lbs.	Kg.
A31188	Coiled and individually bagged	Box	100	8.125	207	0.43	0.20
A31189	Flat and bagged	Bag	100	8.125	207	0.43	0.20
A31089	Flat and bagged	Bag	100	14.250	362	0.71	0.32

Tie-Dex II Micro Tool

Cat. No.	Description		Qty. per Pack	Weight		
				Lbs	Kg.	
A30199	Pre-calibrated Hand Tool to install Micro Band		1	1.20	0.550	
A46799	Replacement part - Cut off blade Kit		1	0.01	0.005	
A35599	Pneumatic tool to apply Tie-Dex Micro Bands See page 18		1	5.26	2.370	



A30199 Tie-Dex II
Micro Tool

Tie-Dex Micro Tool/Gauge Kit

Cat. No.	Description		Qty. per Pack	Weight		
				Lbs	Kg.	
A59099	Kit- Tie-Dex II Tool/Gauge		1	4.60	2.12	



A49099 Tie-Dex II
Tool/Gauge Kit

A59099 Tie-Dex II
Micro Tool/Gauge Kit

Tie-Dex Micro Gauge

Cat. No.	Description		Qty. per Pack	Weight		
				Lbs	Kg.	
A47599	Tension Gauge		1	1.00	0.45	



A50099 Tie-Dex
Calibration Kit

Accessories for Tie-Dex II and Tie-Dex Micro pneumatic tools

Tie-Dex Calibration Kit

Use with all Tie-Dex tools

Cat. No.	Description		Qty. per Pack	Weight		
				Lbs	Kg.	
A50099	Contents: Calibration device, tool mounting bracket for all 3 tools, Test band, Hex key for bracket removal , Calibration key, Carrying case.		1	4.30	2.00	
A50599	Replacement Tie-Dex Test Band		50	0.33	0.15	
A50699	Replacement Micro Tie-Dex Test Band		50	0.13	0.06	

Tie-Dex Calibration Device

Use with all Tie-Dex tools

A50189	Calibration Device	1	1.18	0.53
--------	--------------------	---	------	------

Cable Fixing & Identification



Identification Tags and Embossing System

I.D Tag Imprinter

Pkg. Qty. 1

Cat. No.	Description	Weight	
		Lbs.	Kg.
ID200	I.D. Tag Imprinter with 3/32" (2.38mm) Character Wheel	29.5	13.4
ID202	I.D. Tag Imprinter with 1/16" (1.59mm) Character Wheel	29.5	13.4
ID203	I.D. Tag Imprinter with 1/8" (3.18mm) Character Wheel	29.5	13.4
ID204	I.D. Tag Imprinter with 3/16" (4.76mm) Character Wheel	29.5	13.4



I.D. Tag Imprinter

I.D. Kit

Pkg. Qty. 1

Cat. No.	Description	Weight	
		Lbs.	Kg.
ID300	Handy Kit contains: One Tie-Lok Tool plus 200 pcs. I.D. Tags 3/4" x 2" (19.05 x 51mm) 100 pcs. I.D. Tags 1 1/2" x 2 1/2" (38.1 x 63mm) 100 pcs. I.D. Tags 3/4" x 3 1/2" (19.05 x 89mm) 100 pcs. Tie-Loks 1/4" x 10" (6.35 x 254mm) 200 pcs. Tie-Loks 1/4" x 16.5" (6.35 x 419mm) 100 pcs. Tie-Loks 1/4" x 22.5" (6.35 x 572mm)	21.5	9.80



I.D. Kit

I.D. Band Guide Kit

Pkg. Qty. 1

Cat. No.	Description	Weight	
		Lbs.	Kg.
ID285	Fixture to imprint directly onto Tie-Lok Tie	0.50	0.20

I.D. Tags

Cat. No.	Description	Weight	
		Lbs.	Kg.
ID290	3/32" (2.38mm) Letter Dial Kit	2.09	0.95
ID281	1/16" (1.59mm) Letter Dial Kit	2.09	0.95
ID282	1/8" (3.18mm) Letter Dial Kit	2.09	0.95
ID283	3/16" (4.76mm) Letter Dial Kit	2.09	0.95
ID284	1/4" (6.35mm) Letter Dial Kit	2.09	0.95

I.D. Tags

Pkg. Qty. 100

304SS Cat.No.	316SS Cat.No.	Thickness		Width		Length		Weight	
		In.	mm	In.	mm	In.	Mm	Lbs.	Kg.
ID 100	ID440	0.010	0.254	0.75	19.05	2.0	51	0.5	0.22
ID 101	ID441	0.015	0.381	1.50	38.10	2.5	63	1.2	0.55
ID 102	ID442	0.015	0.381	0.75	19.05	3.5	89	0.8	0.36



ID101, ID441

Customised Embossed Tags

Pkg. Qty. 1

Cat. No.	Width		Thickness		No. of Characters
	In.	mm	In.	mm	
AE487	0.39	10	0.01	0.25	1-10
AE488	0.39	10	0.01	0.25	11-20

Customised Embossed Tags



S.S. Tape Embossing System

Pkg. Qty. 1

Cat. No.	Description	Weight	
		Lbs.	Kg.
ID400	Hand-held tool for embossing S.S. ID Tape	2.57	1.17
ID405	S.S. Tape, Width: 1/2" (12.7mm), Thickness: 0.005" (0.127mm) Length: 20' (6m)	0.18	0.01



ID400 Embossing Tool

ID405 Replacement tape
1/2" (12.7mm) wide



Fasten embossed tape with Ball-Lok or Tie-Lok ties

EASY READ I.D. System

- A complete range of letters, numbers and symbols
- Made from 316 Stainless Steel
- Easy to read in dim light
- Fits over Easy Strips or carriers
- Slide them directly onto cable ties
- Fasten strips and carriers to pipes and cables with cable ties

EASY READ Characters

Pkg. Qty. 100

Type 316 Stainless Steel

Cat. No.	Description/Order No.	Weight	
		Lbs.	Kg.
AE010	EASY A	0.31	0.14
AE011	EASY B	0.31	0.14
AE012	EASY C	0.31	0.14
AE013	EASY D	0.31	0.14
AE014	EASY E	0.31	0.14
AE015	EASY F	0.31	0.14
AE016	EASY G	0.31	0.14
AE017	EASY H	0.31	0.14
AE018	EASY I	0.31	0.14
AE019	EASY J	0.31	0.14
AE020	EASY K	0.31	0.14
AE021	EASY L	0.31	0.14
AE022	EASY M	0.31	0.14
AE023	EASY N	0.31	0.14
AE024	EASY O	0.31	0.14
AE025	EASY P	0.31	0.14
AE026	EASY Q	0.31	0.14
AE027	EASY R	0.31	0.14
AE028	EASY S	0.31	0.14
AE029	EASY T	0.31	0.14
AE030	EASY U	0.31	0.14
AE031	EASY V	0.31	0.14
AE022	EASY W	0.31	0.14
AE032	EASY X	0.31	0.14
AE033	EASY Y	0.31	0.14
AE034	EASY Z	0.31	0.14
AE018	EASY 1	0.31	0.14
AE037	EASY 2	0.31	0.14
AE038	EASY 3	0.31	0.14
AE039	EASY 4	0.31	0.14
AE040	EASY 5	0.31	0.14
AE041	EASY 6	0.31	0.14
AE021	EASY 7	0.31	0.14
AE042	EASY 8	0.31	0.14
AE041	EASY 9	0.31	0.14
AE024	EASY 0	0.31	0.14
AE035	EASY MINUS/HYPHEN -	0.31	0.14
AE036	EASY BLANK	0.31	0.14
AE046	EASY PLUS +	0.31	0.14
AE047	EASY EARTH	0.31	0.14
AE048	EASY SINE	0.31	0.14
AE049	EASY SLASH/	0.31	0.14
AE053	ARROW	0.31	0.14



Easy Carrier can be applied using Tie-Lok Ties, Ball-Lok Ties, or Multi-Lok Ties.



Easy Strip applied with Multi-Lok ties

EASY READ characters threaded onto Multi-Lok and BAND-IT Cable Ties



Flag Tag created with Tie-Lok threaded through hole in Easy Carrier

EASY READ Characters and Easy Carrier

EASY READ Carriers

Pkg. Qty. 100

Cat. No.	Description/Order No.	Width		Length		Weight	
		In.	mm	In.	mm	Lbs.	Kg.
AE043	EASY CARRIER 6	0.38	9.53	3.64	92.5	0.73	0.33
AE044	EASY CARRIER 10	0.38	9.53	5.14	130.6	1.25	0.56
AE045	EASY CARRIER 16	0.38	9.53	7.39	187.7	1.47	0.66
AE050	EASY STRIP Short	0.38	9.53	4.25	108.0	0.98	0.44
AE051	EASY STRIP Medium	0.38	9.53	5.75	146.0	1.33	0.60
AE052	EASY STRIP Long	0.38	9.53	8.00	203.2	1.85	0.83


EASY READ Kit

Pkg. Qty. 1

Cat. No.	Description/Order No.	Weight	
		Lbs.	Kg.
AE060	EASY READ Kit - Contains 50 of each character/carrier/strip	5.60	2.54

AE060 EASY READ Kit