# BAND-IT®

## HOSE CLAMPS



#### Table of Contents

BAND-IT JR 201 SS Smooth ID Preformed Clamps	2
BAND-IT® Ultra Lok Clamps 201 SS Hard	<u>3</u>
BAND-IT® Centre Punch Clamps	4
Band & Buckles 201 Stainless Steel	<u>5</u>
BAND-IT® Giant Band & Buckles 201 Stainless Steel	<u>6</u>
BAND-IT® Uncoated Band & Buckles 316 Stainless Steel	<u>6</u>
BAND-IT® ID Tags	<u>7</u>
BAND-IT® Cable Ties 316 Stainless Steel	<u>7</u>
Tool Instruction Manuals	8



10-12 McWilliam Street Springvale Vic 3171 Phone: (03) 9547 5833 Fax: (03) 9548 1537

PO Box 2 Sandown Village Vic 3171 www.uespromura.com.au sales@uespromura.com.au



## BAND-IT JR ® 201 SS Smooth I.D Inner Diameter Pre-Formed Clamps

## **BAND-IT JR ® Smooth I.D Pre-Formed Clamps**

As stiffer and thinner materials increasingly replace soft, spongy thick-walled rubber. BAND-IT ® developed the Smooth ID JR ® preformed clamp in both 201 and 316 steel, with a uniform gapfree inside diameter, that virtually eliminates leaks and has double wrapped steel bands for additional strength. With a Lip-lock design to be vibration resistant - no need for hammering or crimping. BAND-IT JR ® Smooth I.D Pre-Formed Clamps can be applied with the C001 Tool and either the J001 or J050 Adapters depending on the size. For high speed & large volumes they can also be applied with the S750 Pneumatic Tool.

#### S750 Pneumatic Junior Clamp tool





### BAND-IT JR® 201 Stainless Steel Smooth Preformed ID Clamps

Width:		Thickness	
6.35mm 9.53mm		0.51mm 0.64mm	
9.53mm 12.7mm – 19.05mm			mm mm
12.71111			111111
Code / Box qty	Clamp ID mm (Inside Diameter)	Clamp Width	Box Weight Kg
JS240 (100)	19.10	6.35	0.9
JS201 (100)	20.60	9.53	1.6
JS242 (100)	25.40	6.35	1.0
JS243 (100)	25.40	9.53	1.8
JS203 (100)	25.40	12.70	3.0
JS204 (100)	31.80	12.70	3.3
JS241 (100)	34.90	6.35	1.1
JS202 (100)	34.90	9.53	2.5
JS252 (100)	38.10	6.35	1.1
JS205 (100)	38.10	15.88	4.8
JS236 (100)	44.50	12.70	3.9
JS206 (100)	44.50	15.88	5.2
JS253 (100)	50.80	6.35	1.5
JS245 (100)	50.80	9.53	2.6
JS237 (100)	50.80	12.70	4.2
JS207 (100)	50.80	15.88	5.6
JS208 (100)	57.20	15.88	5.8
JS233 (100)	63.50	12.70	4.9
JS209 (100)	63.50	15.88	6.2
JS230 (100)	69.90	12.70	5.1
JS210 (50)	69.90	19.05	3.9
JS234 (100)	76.20	12.70	5.4
JS211 (50)	76.20	19.05	4.5
JS212 (50)	88.90	19.05	4.7
JS213 (25)	101.60	19.05	2.6
JS214 (25)	114.30	19.05	2.9
JS215 (25)	127.00	19.05	3.3
JS216 (25)	152.40	19.05	3.7
Band-lt 316	Stainless Steel clan	nps available u	oon request.

Tool for Band-It with adapters J000 & J050

C001	BAND-IT® Tool to use with adapters – 2 kg
J001	Recommended for band width < 13mm
J050	Recommended for band width > 10mm





2

#### **ULTRA-LOK® CLAMPS**

Designed for quick installation, highest clamping force and gap-free inside diameter.

The best choice for demanding applications!



- Strongest band clamping system available
- Double wrapped 1/4 hard 201SS for superior strength
- Unique lock formed under full tension maximizes tightness
- Thicker buckle is 2-3 times stronger than other preformed clamps
- Smooth inside diameter designed to eliminate leak paths
- Buckle hood protects lock from snags
- Clamps can be applied either with the UL9010 Electric Tool or UL4000-D 18 Volt Rechargeable Tool.



### BAND-IT ULTRA-LOK ® 201 Stainless Steel ¼ Hard Clamping System

Thickness: 0.76mm

Code / Box qty	Clamp ID mm (Inside Diameter)	Clamp Width	Box Weight Kg
UL2109 (50)	69.9	19.05	4.3
UL2119 (50)	76.0	19.05	4.8
UL2129 (50)	88.9	19.05	5.4
UL2139 (25)	101.6	19.05	2.9
UL2149 (25)	114.3	19.05	3.2
UL2159 (25)	127.0	19.05	3.4
UL2709 (25)	139.7	19.05	3.3
UL2169 (25)	152.0	19.05	3.8
UL2179 (25)	165.1	19.05	4.2
UL2189 (25)	177.8	19.05	4.4
UL2289 (10)	228.6	19.05	2.3



UL4000-D 18 Volt Rechargeable Cordless Tool



#### **CENTRE PUNCH CLAMPS**

Designed to meet your specific application requirement. Double wrapped with 201 Stainless steel or Galvanised Steel. Used in less demanding applications where minimizing leaks and longevity are not critical. Lock with impact from a hammer using a conical punch designed into the tool.

#### BAND-IT ® Centre Punch Clamps 201 Stainless Steel or Galvanised Steel

Thickness: 0.64 mm

Code	Material	Clamp ID Mm	Clamp Width	Box Quantity	Box Weight Kg
UES 20mmCP3S	201SS	20	9.53	100	1.8
UES 25mmCP4S	<b>201SS</b>	25	15.88	100	3.9
UES 32mmCP5S	<b>201SS</b>	32	15.88	100	3.8
UES 38mmCP6S	<b>201SS</b>	38	15.88	100	4.1
UES 44mmCP7S	<b>201SS</b>	44	15.88	100	4.4
UES 51mmCP8G	Galvanised	51	15.88	100	4.3
UES 51mmCP8S	201SS	51	15.88	100	5.2
UES 57mmCP9S	201SS	57	15.88	100	5.3
UES 64mmCP10S	201SS	64	15.88	50	2.6
UES 70mmCP11S	201SS	70	15.88	50	3.0
UES 76mmCP12S	201SS	76	15.88	50	2.9
UES 89mmCP14S	201SS	89	15.88	50	3.2
UES102mmCP16S	201SS	102	15.88	25	1.9
UES114mmCP18S	201SS	114	15.88	25	2.0
UES127mmCP20S	201SS	127	15.88	25	2.2
UES152mmCP24S	201SS	152	15.88	25	2.6
UES178mmCP28S	201SS	178	15.88	25	2.9
UES203mmCP32S	201SS	203	15.88	25	3.1



**T300 Centre Punch Tool** 



#### **BAND-IT® 201 Stainless Steel Bands**

The BAND-IT® type 201 Stainless steel non-magnetic band is the preferred option in all general use banding applications, offering high tensile strength and good resistance to oxidation and weathering. Available in a variety of widths and thicknesses.

In addition, EASYSCALE – imprinted measurements on the band, help determine band length and eliminate costly waste. Packaged in a standard box or a durable plastic tote for easy dispensing.





BAND-IT® 201 Stainless Steel Bands 30.5m roll				
Code	Width mm	Thickness mm	Weight kg	
C202	6.35	0.51	0.9	
C203	9.53 0.64		1.5	
C204 Blue tote	12.70	0.76	2.4	
C205 Green tote	15.88	0.76	3.0	
C206 Red tote	19.05 0.76		3.6	
BAND-IT® Type 201 Stainless Steel Buckles (100 per pack)				
C252	6.35		0.1	
C253	9.53		0.3	
C254	12.70		0.8	
C255	15.90		0.9	
C256	19.05		1.5	

Tool for Band-It Band & Buckles Weight: 2 kg				
C001	BAND-IT® Tool for bands 6mm - 20mm wide			

#### BAND-IT® 201 Stainless Steel vs BAND-IT® 316 Stainless Steel

Selecting the correct steel will depend on the tensile strength or corrosion resistance specifications of your project.

Corrosion Resistance	201 Stainless Steel	316 Stainless Steel
Mild Atmospheric & Fresh water	Good	Excellent
Industrial Atmosphere	Good	Very Good
Marine Atmosphere	Fair	Very Good
Salt Water	No	Good
Mild Chemical	Fair	Good
Oxidizing Chemical	Fair	Good
Reducing Chemical	No	Good
Ultimate Tensile Strength	690 MPa	550 MPa

#### **BAND-IT®** Giant 201 Stainless Steel Band

BAND-IT® Giant Band is tough where tough counts.

Giant Band produces the strongest band clamp on the market. Giant Band can be formed into a single or double wrapped clamp configuration and offers the widest and thickest band to provide maximum strength. The 201 Stainless steel offers good resistance to oxidation and many moderate corrosive agents.



BAND-IT® Giant Band Type 201 Stainless Steel Roll Length: 30.5m Thickness: 1.12mm					
Code Width Weight kg					
G430	19.05	5.2			
G431	25.40	6.8			
G432					
Buckles 25 per pack					
G440	19.05	0.8			
G441	25.40	1.0			
G442 31.75 1.4					



Tool for Giant BAND-IT® bands Weight: 5kg				
G402	BAND-IT® Giant Tool for bands 19.05mm to 31.75 mm wide x 1.12 mm thick			

## BAND-IT® 316 Stainless Steel Band Uncoated

The BAND-IT® 316 Stainless Steel Band-It straps provides superior corrosion resistance in fresh water and typical atmospheres and is non-magnetic. Ideal for food process, chemical / agricultural hose assemblies, marine splash zones and some acidic environments.

7
The same of the sa
4
C001 Band it Tool

BAND-IT® Uncoated 316 Stainless Steel 30.5m roll					
Code	Width Thickness Weight mm kg				
C403	9.53	0.63	1.5		
C404	12.70	0.76	2.4		
C406	19.05 0.76		3.6		
Buckles (100 per pack)					
C453	9.53 0.3				
C454	12.70 0.8		0.8		
C456	19.05 1.5		1.5		

BAND-IT® Tool for 316 Stainless Steel		
C001	Band-It Tool for bands 6mm – 20mm wide Weight: 2.0 Kg	

#### **ID Tagging System**

Identify your cable bundles or hose assemblies with permanent 316 stainless steel imprinted tags applied with Ball-Lokt™ Ties.


An ID Tag imprinter is available with a choice of character sizes.

ID Tags 316 Stainless Steel 100 per pack					
Code	Length mm	Width mm	Weight gm		
ID440	51	19	300		
ID441	63	38	800		
ID442	89	19	500		



ID 200
ID Tag Imprinter Tool



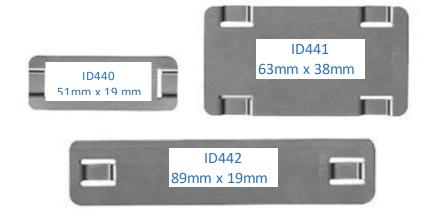

#### Ball-Lokt™ Cable Ties

For applications ranging from identification tagging to bundling cables, Ball-Lokt™ Ties in 316 stainless steel, provide a longer life than nylon ties, especially in extreme climates.

The epoxy coated ties are UV resistant and provide minimal cracking when exposed to lower temperatures or harsh conditions.

Self-locking design installation by hand or with the KS652 tool, to assure uniform tension and clean tail cut-off for safe handling.

(100 per pack)					
Code	Length mm	Width mm	Weight gm		
KT6U046-200	200	4.6	250		
KT6U046-350	350	4.6	400		
KT6U046-500	500	4.6	500		
KT6U078-200	200	7.8	500		
KT6U078-350	350	7.8	750		
KT6U078-500	500	7.8	900		
Black Epoxy Fully Coated – Ball-Lokt™ Ties 316 SS					
KT6B046-200	200	4.6	300		
KT6B078-350	350	7.8	800		

Tool for Ball-Lokt™ Ties Weight: 600 gm

Ball-Lokt™ Ties 316 Stainless Steel

KS652	Ball-Lok Tensioner & Cutter 1 Ties	for SS Cable

#### Click on the image to save or open the instruction manuals:



Starting a project and needing BAND-IT® stock?
We ship nationwide and are able to send express!
Have a question?

Call our friendly team (03) 9547 5833

Email us: info@band-it-australia.com.au or visit our

Website: www.band-it-australia.com.au